


Clover Leaf Reactors

The "Clover Leaf" Closure Reactors provide maximum ease for quick opening or closing of the cover. The cover is simply inserted into the body and then rotated one-eighth of a turn. A safety locking pin is provided to insure that the cover is properly positioned and locked.

Standard material of construction for these reactors is heat treated 4340 alloy steel. Standard connections include two high pressure (coned and threaded) 1/4" O.D. tubing connections (HF4).

Mounting holes are provided in the top and bottom of the body for securing or lifting.

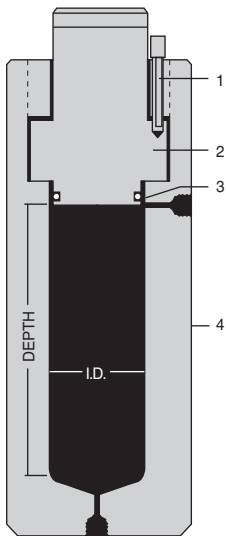

1. LOCK PIN
2. COVER
3. O-RING
4. BODY

Clover Leaf Closure Reactors

Catalog No.	Inside Diameter	Outside Diameter	Inside Depth	Working Pressure psi	Temperature Rating °F	Capacity	Material
CL-1 CL-2 CL-3	3"	6 1/2"	9" 18" 22"	30,000	250	1,000 mL 2,000 mL 2,500 mL	Alloy Steel
CL-8 CL-9	4"	9 1/2"	9" 18"	30,000	250	1,850 mL 3,700 mL	Alloy Steel